




PERFECTLIGHTNING
www.perfectlightning.com

PL-0429

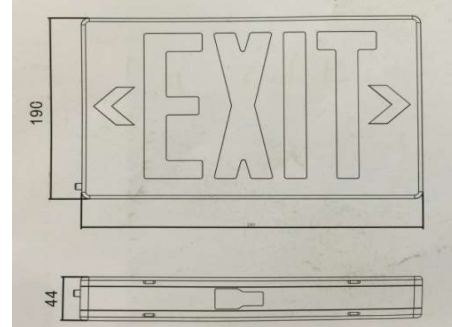

Product Name: UL Approved EXIT SIGN (Red Letters)

Model No: PL-0429

Product Size: 29.5*19*4.4cm

UL Number: E480534

Features:

- UL Approved EXIT SIGN
- Injection-molded thermoplastic ABS housing UL 94V-0 flame rating, fire-retardant
- 120/277 VAC dual voltage operation Letter 6"height with 3/4"stroke
- Single or double face configuration
- LED indicator light and push button test switch
- Nickel-cadmium battery (1.2V 1000mAh) delivers more than 90-minute capacity on emergency mode
- Low voltage battery disconnection-preventing deep discharge damage to the battery
- Universal mounting plate with EZ quick connect for rapid installation

TECHNICAL DATA:

- Mode of Operation: Maintained
- Input Voltage: 120/277VAC 60HZ
- Battery: 1.2V 1000mAh Nickel Cadmium Battery
- Suitable Damp Location
- Operating Temperature: 0°C~40°C
- Backup Time: ≥90minutes
- Compliance: UL E480534
- Protection: Low-Voltage Cut-Off to prevent Over-Discharge of Battery